



Certified to NSF/ANSI/CAN 61

Permanent Magnet Motors

Powering the AquaGenix* Potable Water Pump System

Better efficiency, improved reliability, lower ESP operating costs

Applications

Artificial lift using NSF 61 certified electric submersible pumps

Benefits

Lower ESP operating expense through reduced power consumption

Reduced equipment string length for

- Deeper pump setting depths
- Improved wellbore access through doglegs

Features

- Designed to work with 5, 7 & 9 series pumps
- Wide operating speed range: 500 – 4,200 rpm
- Motor efficiency up to 93%
- High power factor (very close to 1)
- No rotor slip
- Locked rotor bearing design

The proven technology of permanent magnet motors (PMMs) has shown to reduce operating expenses attributable to ESP power consumption up to 20% or more. PMMs also experience lower heat rise than an equivalent horsepower (HP) induction motor (IM) contributing to improved reliability and longer run life. The higher HP rotor density means PMMs are also significantly shorter than an IM equivalent, which enables deeper pump setting depths as well as facilitating better clearance through severe doglegs or tortuous well paths. All Levare PMMs come as single section motors.

Levare PMM performance is optimized using a proprietary vector control algorithm in the surface variable speed drive (VSD).

Key motor performance characteristics – determined under a controlled lab tuning process – are uploaded to the control algorithm enabling the VSD to optimize motor power consumption and control stability uniformly across the full spectrum of motor load variation.


As the global leader in PMM technology development and experience, Levare first introduced PMM technology in 2006 and has since deployed more than 22,000 PMMs worldwide.

Maximum run life of Levare PMM exceeds 2,900 days.



PMM vs. IM Advantages


Results of field test comparisons of PMM to IM performance conducted by Levare and lab testing conducted by five major operators are summarized in the graphic. The tests confirmed the superior performance of PMMs.

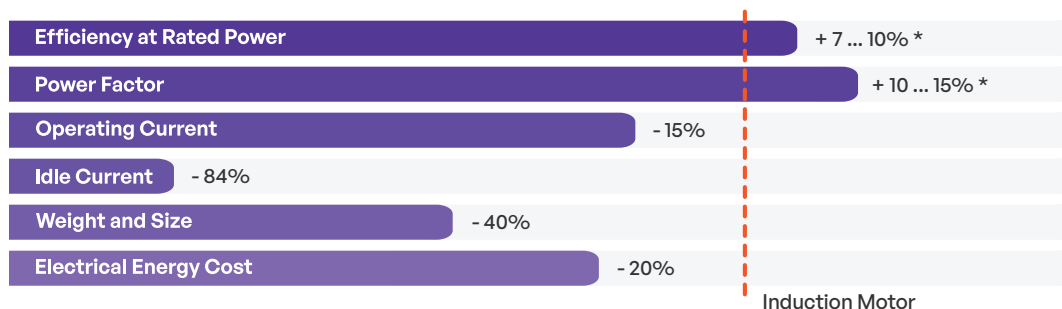

* mark of Levare International

PMM Operating Principle

Permanent magnets made of sintered hard-magnetic materials are incorporated into the design of the PMM rotor. It is the rotor flux produced by these magnets that interacts with the stator magnetic field to produce motor torque. Power consumption and heat rise are both reduced since no current is induced in the PMM rotor.

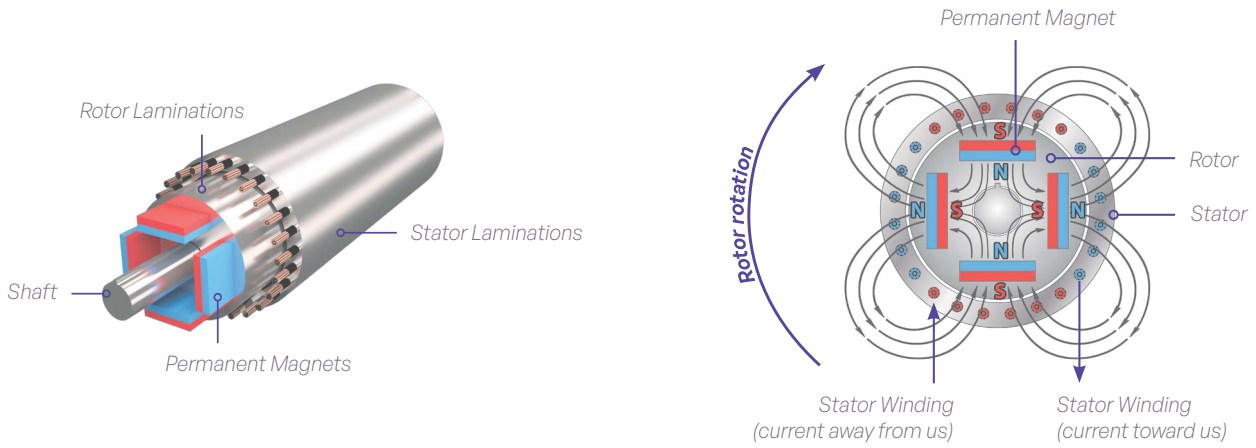

Available PMM Sizes and Horsepower Range

		HP	25	50	100	500	1000	1500
Operating Range 500 - 4,200 rpm	5 Series		40	[Bar from 50 to 400]			400	
	7 & 9 Series				100	[Bar from 100 to 980]		980